Replace the filters yourself in about 10 minutes


Vallox Digit 2 SE


1 × F7 filter
432×189×28 mm, supply

2 × G4 filter cloth
2 × 433×175

2× a year
recommended interval

1 Where are the filters?

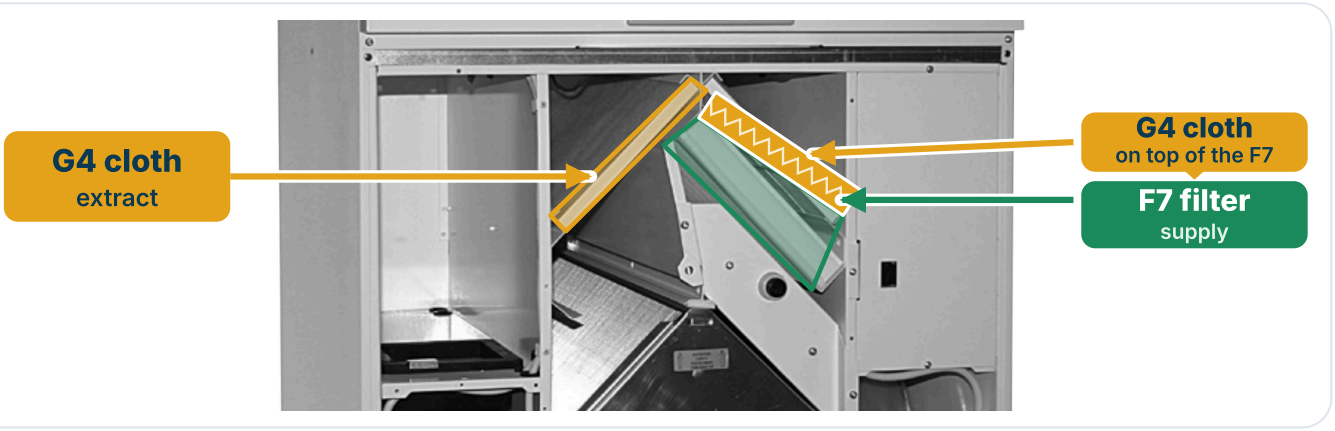




The G4 cloth goes on top of the F7 filter

Lay the new cloth flat and smooth on the side of the F7 filter where the air comes in (the yellow strip in the drawing). Then slide the F7 filter back in together with the cloth.

Unit seen from the front, door removed. Green: F7 filter; the yellow strip on it is the supply G4 cloth. Separate yellow: the extract G4 cloth. The drawing shows the right-hand model (R); on the left-hand model (L) everything is mirrored.

2 Most important: the arrow on the F7 filter

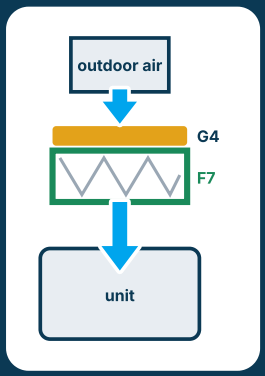

Fit the F7 filter the same way as the old one. The arrow must point THE SAME WAY

Before taking out the old filter, check where the arrow on its frame points, or take a photo with your phone. The arrow shows the airflow direction: away from the G4 cloth, into the unit. A filter fitted the wrong way round does not clean the air properly.

3 Right way and wrong way



Right
F7 arrow points the same way as on the old one, cloth on top



Wrong
Arrow reversed, filter the wrong way round

4 Replacing the filters step by step

1 Switch the unit off

Unplug the unit. The door also has a safety switch, but the power must be off before any maintenance.

2 Open the door

Open the unit door. The safety switch on the door turns the unit off.

3 Take out the old filters

Take out the F7 filter and both G4 cloths with their support grids. First check where the arrow on the old F7 filter points.

4 Find the arrow on the new F7 filter

Turn the F7 filter so that the arrow points **THE SAME WAY AS THE OLD ONE**. Check that the seal is intact.

5 Fit the new filters

Lay the new G4 cloths flat and smooth on the support grids and slide them back into place. Push the F7 filter all the way in.

6 Close the door and switch on

Close the door properly (the safety switch must close), plug the unit back in and reset the service reminder on the control panel. Done!

How often to replace?
We recommend replacing them twice a year, in spring and autumn. The manufacturer's minimum is once a year.

Replace all three together
The set contains one F7 filter and two G4 filter cloths. Always replace them all at once. Do not run the unit without filters.

Anything unclear?
Contact us and we will help you find the right filter: filt.ee

Old filter
Put it in a plastic bag and dispose of it with household waste.